
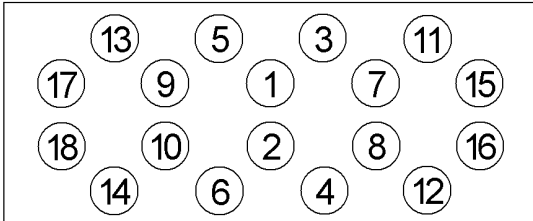


Anziehvorschrift für Zylinderkopf		431.070 passend für / suitable for adaptable à / adaptable a Mitsubishi	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete	
 709.310 M 12 x 104			
Anziehen/ Tightening/ Serrage/ Apriete	* ➤	L 200: 66,85,98 kW Pajero Sport 15 Nm 30 Nm 120°	L 200: 73 kW * 29 +/- 2 Nm ➤ 120°
Zeichenerklärung / Explanations / Explication / Explicacion			
* ★ □ ● ➤	neue Zylinderkopf- schrauben verwenden Warmlauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor			
Ø: 92,5 mm; 1/4: 1,45 mm			
Mot: 4D56T 2,5 ltr. TD			
L200 2001- Pajero Classic 2002- Pajero Sport 2002-			
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*431.070*	